

TECHNICAL DATA SHEET

Retro Traditional 2/3 Outlet Digital Shower, Chrome

RETRO-TRAD-CH

TED[®]

Thirty Eight Degrees

5

YEARS
WARRANTY



SPECIFICATION

Brand	TED Digital
Range	Showering
Product Type	Retro 2/3 Outlet Digital Shower
Material	Brass controls, indices and plate
Connection Size	1/2" BSP inlets; 1/2" BSP outlets

CODE(S) & FINSHES

RETRO-TRAD-CH Chrome
Only available from TED directly.

PACK CONTENTS

Box 1

- Digital processor mixing box
- Digital diverter
- Cables and power supply

Box 2

- Octagonal backplate (fit vertically or horizontally)
- Controls pack with button, screen, colour-matched trims and white indices

Pack 3

- Adapter cable set to use Crosswater data cable

TECHNICAL INFORMATION

Connecting pipework not supplied.

40mm min wall depth for controls.

Min 42mm diameter holes in wall required for controls.


Selectable white or colour changing light ring round control dial.

Retrofit solution for traditional style bathrooms with digital showers.

FLOW RATES

Pressure (Bar)	Flow Rate (L/min)
0.2	6.9
0.5	11.2
1	16.4
2	24.5
2.5	27.7

DIAGRAM of CONTROLS

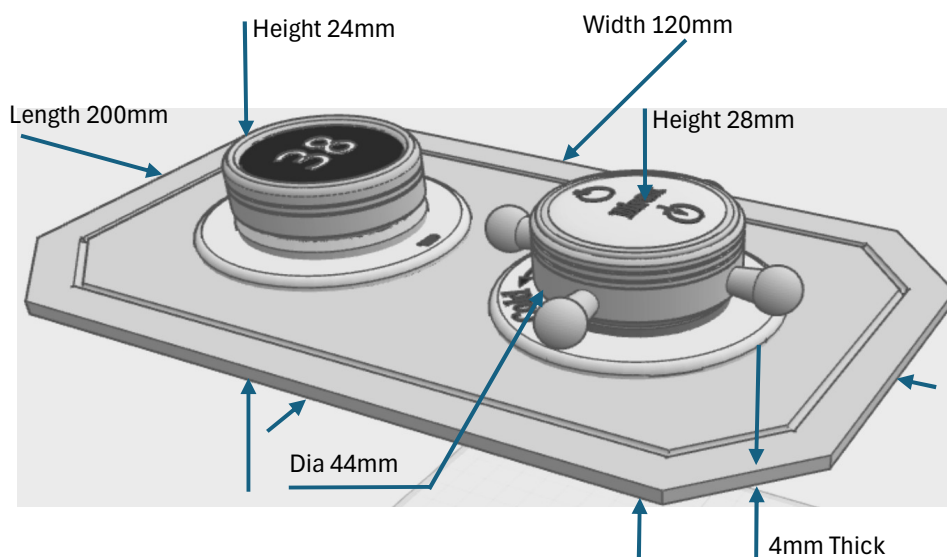

TECHNICAL DATA SHEET

Retro Traditional 2/3 Outlet Digital Shower, Chrome

RETRO-TRAD-CH

TED[®]

Thirty Eight Degrees

5

YEARS
WARRANTY

The illustration shows a typical loft-mounted installation, where the Diverter and Processor/Mixing Box are concealed in the loft.

IMPORTANT INSTALLATION INFORMATION:

Power Cable Protection:


Ensure the power cable is installed within a conduit for protection and easy access.

Processor Accessibility:


The processor must remain accessible at all times.

Connecting the Wireless Button:


- Completely power off the digital system: Unplug it from the wall, then immediately plug it back in, or
- Remove the fuse from the spur and immediately replace it.
- Quickly press the wireless button twice and wait for several seconds.
- Press the wireless button again. It should now be paired with the system.

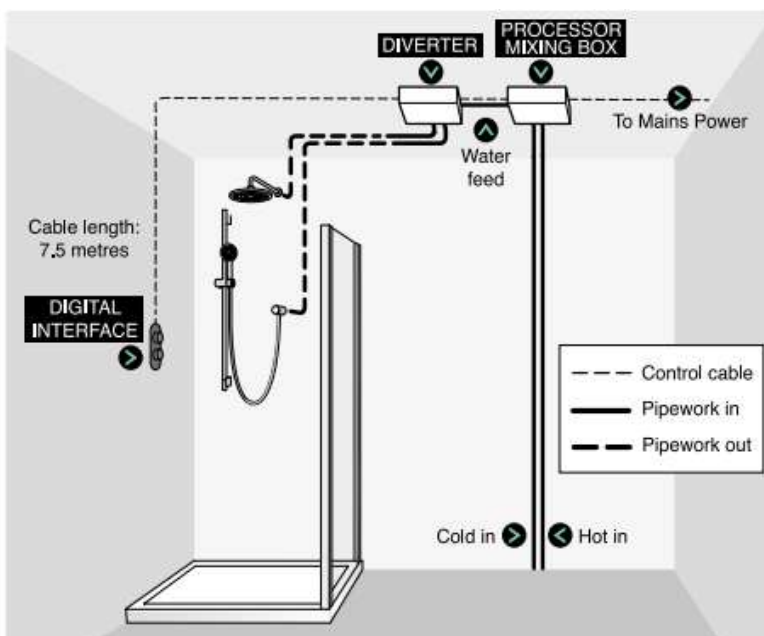

TED DIGITAL PROCESSOR/MIXING BOX

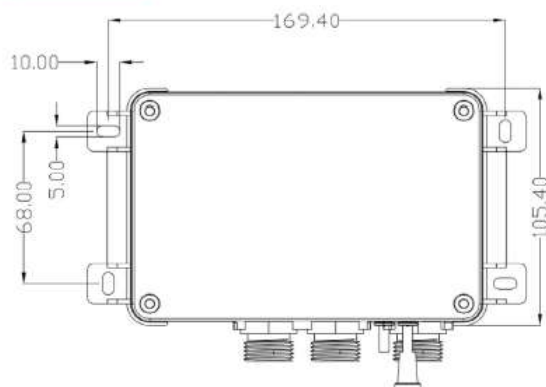

TED DIGITAL DIVERTER

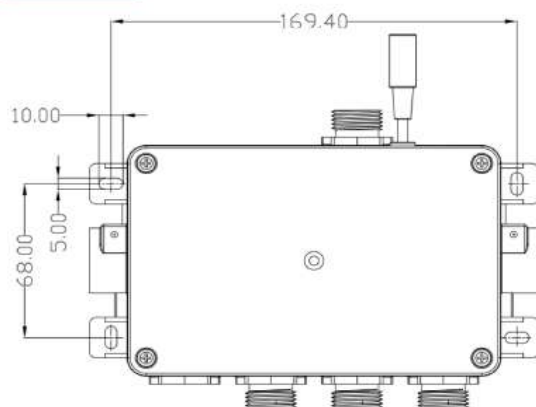

System Connection Diagram

