

# TECHNICAL DATA SHEET

Togo 2/3 Outlet Digital Shower, Ring Backplates, 7 Colours



Thirty Eight Degrees

TOG-RING-XX



### SPECIFICATION

Brand	TED Digital
Range	Showering
Product Type	Togo 2/3 Outlet Digital Shower
Material	Brass controls, brass rings
Connection Size	1/2" BSP inlets; 1/2" BSP outlets

### CODE(S) & FINSHES

TOG-RING-BB	Brushed Brass
TOG-RING-BN	Brushed Nickel
TOG-RING-BR	Brushed Bronze
TOG-RING-CH	Chrome
TOG-RING-GG	Gunmetal Grey
TOG-RING-MB	Matt Black
TOG-RING-MW	Matt White

### PACK CONTENTS

- Ring Backplates (fit vertically or horizontally)
- Controls pack (button and screen) with colour-matched trims
- Digital processor mixing box
- Digital diverter
- Cables
- Power supply


### TECHNICAL INFORMATION

Connecting pipework not supplied.  
40mm min wall depth for controls.  
Min 34mm diameter holes in wall required for controls.  
Cables to be installed in conduit for future maintenance access.

### FLOW RATES

Pressure (Bar)	Flow Rate (L/min)
0.2	6.9
0.5	11.2
1	16.4
2	24.5
2.5	27.7

### DIAGRAM of CONTROLS

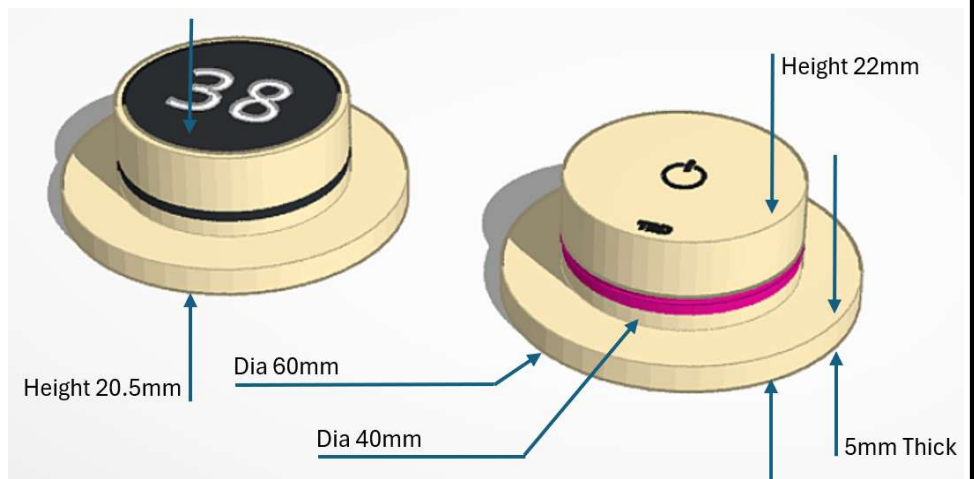

# TECHNICAL DATA SHEET

Togo 2/3 Outlet Digital Shower, Ring Backplates, 7 Colours



Thirty Eight Degrees

TOG-RING-XX

5

YEARS  
WARRANTY

The illustration shows a typical loft-mounted installation, where the Diverter and Processor/Mixing Box are concealed in the loft.

**IMPORTANT INSTALLATION INFORMATION:**

**Power Cable Protection:**


Ensure the power cable is installed within a conduit for protection and easy access.

**Processor Accessibility:**


The processor must remain accessible at all times.

**Connecting the Wireless Button:**


- Completely power off the digital system: Unplug it from the wall, then immediately plug it back in, or
- Remove the fuse from the spur and immediately replace it.
- Quickly press the wireless button twice and wait for several seconds.
- Press the wireless button again. It should now be paired with the system.

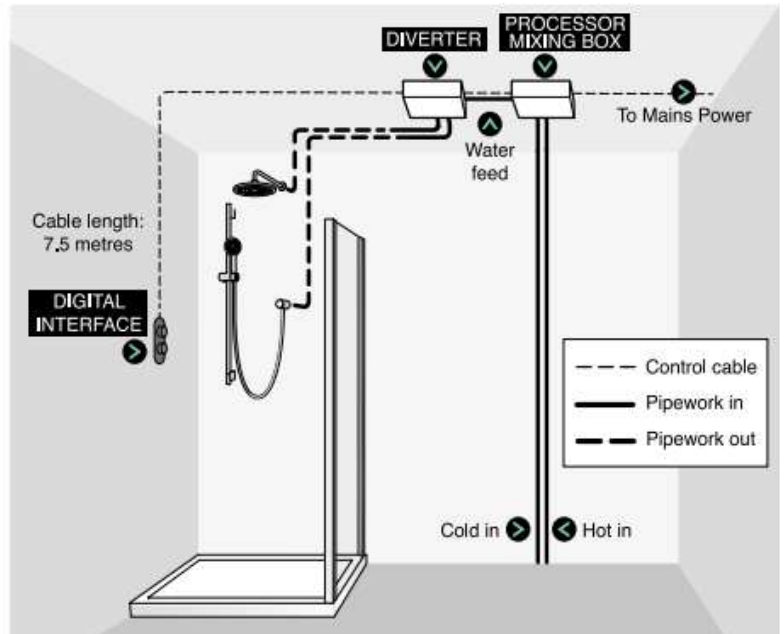

**TED DIGITAL PROCESSOR/MIXING BOX**

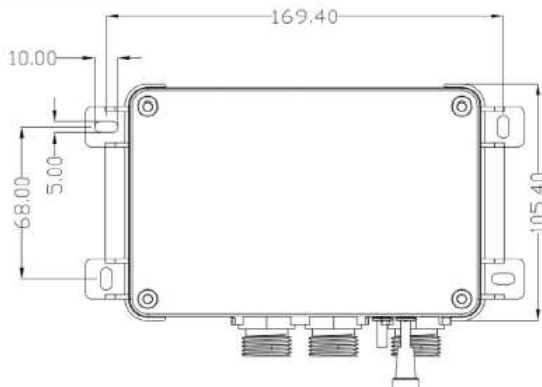

**TED DIGITAL DIVERTER**

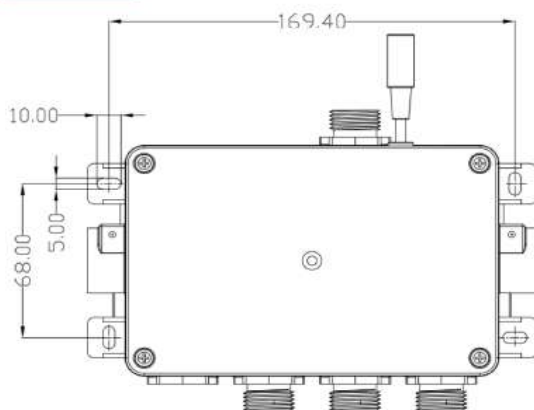

**System Connection Diagram**

